

Application of Multi-Criteria Decision Analysis for Choice Geokhods Cutting Head

Alexei Khoreshok¹, Kirill Ananyev¹, Aleksandr Ermakov¹, and Elena Golikova²

¹T.F. Gorbachev Kuzbass State Technical University, 650000, Kemerovo, Russian Federation

²Prokopyevsk branch of T.F. Gorbachev Kuzbass State Technical University, 653033, Prokopyevsk, Russian Federation

Abstract. The article deals with the choice of cutterheads for Geokhod in the early development stages. Early development stages are characterized by the lack of quantitative characteristics, such as cutting forces, weight, feed forces, etc. In this case, the choice is made on the accordance of the cutterheads with the requirements for them. Under such conditions were determined the most appropriate method of multi-criteria analysis for the choice of the cutterheads – "ELECTRE III". The results of the use of this method are established the most fully meet the requirements cutter heads: a rotary, drum, and head with fixed heads.

1 Introduction

At the early development stages of the technical objects, which include the geokhod's cutterheads [1-3], it is necessary to determine the range of the more fully satisfying for requirements technical solutions from a variety of possible solutions. At this stage, there are often no quantitative characteristics of the solutions (alternatives). With a certain set of requirements to the cutterheads [4], this problem is a multi-criteria problem of choice [5] – Multi-Criteria Decision Analysis (MCDA).

Nowadays there are more than 70 MCDA methods [6], which are based on different approaches to the formalization of the rational choice model [7]:

- value and utility functions;
- outranking methods;
- methods of verbal analysis, etc.

Each of these methods can be better for solving a particular task and we can't prefer one of it initially.

Thus, the objectives of the study are:

- to determine the MCDA method for the choice of the cutterheads for geokhod;
- to choose the cutting heads that the best satisfying for requirements for geokhods cutting heads.

2 Materials and Methods

In [8] the MCDA method choosing by the presence of input data, while several methods can be included in one group. Method's determination by the appropriateness index (AI) for the solving task [6] allows quantifying the applicability of the method by several attributes.

The features of the MCDA methods are identified by the relevant evaluation criteria. For determining criteria, twelve questions are defined. Three questions are the filtering questions and nine questions are the scoring questions [6].

Filtering questions:

1. Is the method able to solve the problem (choice, optimization etc.)??
2. Should the method be compensatory/non-compensatory (compensate for the low value of one criterion due to the high value of another criterion)?
3. What input data is required by the method?

Scoring questions:

1. What preference information does the method need?
2. What decision rule does the method use to rank or sort the alternatives?
3. Does the method evaluate the feasibility of the alternatives?
4. Can the method handle any subjective attribute?
5. Does the method handle qualitative or quantitative data?
6. Does the method deal with discrete or continuous data?
7. Can the method handle the problem with the hierarchy structure of attributes?
8. Is the method able to capture uncertainties existing in the problem?
9. Can the method support visual analytics?

For each scoring question are assigned a weighting factor, which can take integer values from 0 to 10, where 0 stands for extremely unimportant while 10 represents extremely important.

The filtering questions are utilized to screen out inappropriate methods. Appropriate methods are comparing on the scoring questions. If the answer is affirmative, it means that the method is able to perform the required feature, and the method is assigned a value of one for this criteria, if not – zero.

AI of the j -th method is determined by Equation [6]

$$AI_j = \frac{\sum_{i=1}^n w_i b_{ji}}{\sum_{i=1}^n w_i} 100\%, \quad (1)$$

where n is the number of evaluation criteria used to examine the methods with respect to the given problem, w_i are the weighting factor of the i -th scoring question, b_{ji} is an evaluation of the j -th method on the i -th scoring question ($b_{ji} = 1$ or 0).

AI ranges from 0 to 100%, the higher value of AI is better to solve a given decision problem.

At the stage of MCDA application, it is impossible to create value (utility) function because there are no quantitative indexes for comparing alternatives at this stage. In addition, there isn't a need to choose a single solution. There is a need to identify several alternatives that the best satisfying for requirements to them. Methods should be non-compensatory, that is, a disadvantage in one criterion cannot be offset by an advantage in other criteria.

Based on this, the required answers to the three filtering questions are formulated:

1. The method is able to solve the problem of choosing several alternatives or ranking alternatives.
2. The method should be non-compensatory or partially compensatory.
3. Input data of the method is the matrix of estimations of alternatives on criteria.

Table 1 shows the results of the MCDA review, containing information on the filtering questions [5-9].

Table 1. The results of the MCDA review, containing information on the filtering questions.

MCDA	Characteristics of the method		
	Solving problems	Compensatory/ non-compensatory	Required input data
MAUT	Choice, ranking	Compensatory	Value function
ELECTRE III	Ranking	Non-compensatory	The evaluation matrix
REGIME	Ranking	Partially compensatory	The evaluation matrix
NAIADE	Ranking	Partially compensatory	The evaluation matrix and value function
AHP/ANP	Choice, ranking	Compensatory	Pairwise comparisons matrix
EVAMIX	Choice	Partially compensatory	The evaluation matrix
PROMETHEE	Choice, ranking	Partially compensatory	The evaluation matrix
MOP/GP	Choice	Compensatory	Value function
MACBETH	Choice, ranking	Compensatory	The evaluation matrix
TOPSIS	Choice, ranking	Compensatory	The evaluation matrix
DEA	Choice, ranking	Compensatory	The evaluation matrix
SMART	Choice	Partially compensatory	The evaluation matrix Value function
LEXOGRATIC	Ranking	Non-compensatory	The evaluation matrix

Four methods have the required answers to the filtering questions: ELECTRE III, REGIME, PROMETHEE, LEXOGRATIC. Information about these methods is considering in table 2.

Table 2. MCDA characteristics.

Characteristics of the method	MCDA			
	ELECTRE III	REGIME	PROMETHEE	LEXOGRATIC
Preference information	Relative criteria weight, indifference, preference and veto thresholds, evaluation of alternatives according to the criteria	Ranked criteria weight, evaluation of alternatives according to the criteria	Relative criteria weight, preference thresholds, evaluation of alternatives according to the criteria	Criteria are ranked in the order of their importance
Decision rule	outranking methods	outranking methods	outranking methods	Compare by the most important criterion
Feasibility evaluation	No	No	No	No
Subjective	Yes	Yes	Yes	Yes
Quantitative/ qualitative data	Quantitative	Quantitative/ qualitative	Quantitative	qualitative
Discrete/ continuous data	Discrete	Discrete	Discrete/ continuous	Discrete

Table 3. MCDA methods comparing on the scoring questions and AI determining.

Scoring questions	Weighting factor, w_i	ELECTRE III	REGIME	PROMETHEE	LEXOGRAFIC
		b_{ji}	b_{ji}	b_{ji}	b_{ji}
1	10	1	0	1	0
2	7	1	1	1	0
3	6	1	1	1	1
4	5	1	1	1	1
5	8	1	1	1	0
6	6	1	1	0	1
7	3	0	0	0	0
8	8	1	1	1	0
9	2	0	1	1	1
AI		91	76	84	35

ELECTRE III has the highest value of AI. It means, that ELECTRE III method the best from ELECTRE III, REGIME, PROMETHEE, LEXOGRAFIC for the choice of the cutter heads for geokhod.

ELECTRE III (ELimination Et Choix Traduisant la Realite) is using the concept of outranking approach [6]. General structure of ELECTRE III is shown in figure 1 [7].

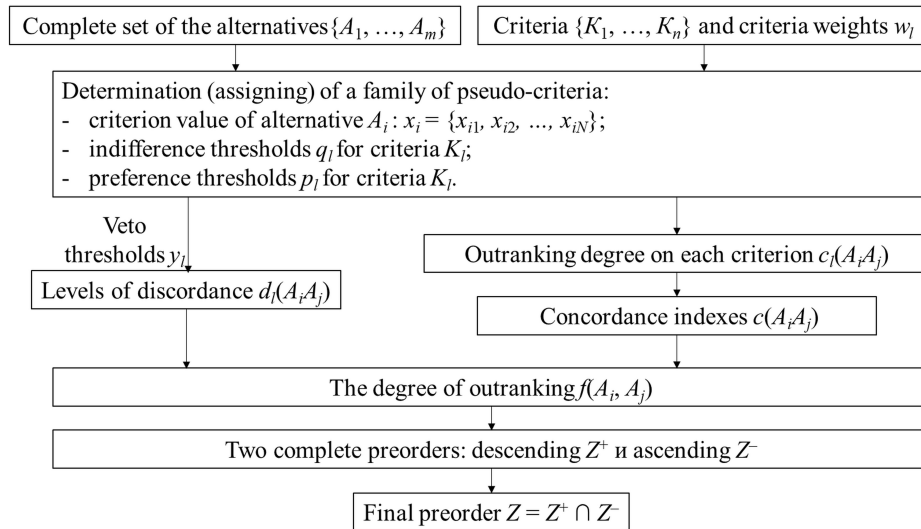


Fig. 1. General structure of ELECTRE III.

The initial data for decision making by ELECTRE III are [7]:

- complete set of alternatives $A = \{A_1, \dots, A_i, \dots, A_j, \dots, A_m\}$;
- criteria $K = \{K_1, \dots, K_i, \dots, K_n\}$;
- $x_{il} = K_i(A_i)$ – criterion value of alternative.

Thresholds and weights represent subjective input provided by the decision maker.

Consider two alternatives A_i and A_j . They can be in the following relations:

- $A_i P_{(i)} A_j$ – A_i is strongly preferred to A_j by criterion K_i , if $x_{il} > x_{jl} + p_i(x_{jl})$;
- $A_i Q_{(i)} A_j$ – A_i is weakly preferred to A_j by criterion K_i , if $q_i(x_{jl}) < x_{il} - x_{jl} \leq p_i(x_{jl})$;
- $A_i I_{(i)} A_j$ – A_i is indifferent to A_j ; and A_j to A_i by criterion K_i , if $x_{il} - x_{jl} \leq q_i(x_{jl})$.

This method and equations for determination of all indicators and ranking of alternatives are described in detail in [5-8].

Results

To solve the task of choosing geokhods cutterheads that more fully satisfying for requirements for them, with the ELECTRE III it is necessary to determine the alternatives and criteria. Different types of geokhod's cutterheads are alternatives [10] (fig. 2). There are cutting drum (A_1), radial multi-heading (A_2), rotating cutterhead (A_3), single-heading (A_4) and double-heading (A_5) cutterheads.

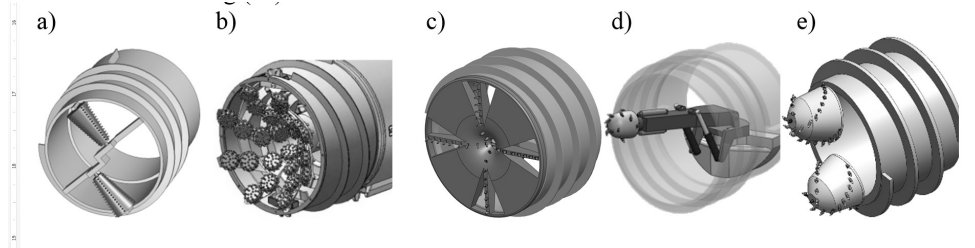


Fig. 2. Different types of geokhods cutterheads: a) – cutting drum, b) – radial multi-heading, c) – rotating cutterhead, d) – single-heading, e) – double-heading.

As criteria are the requirements for geokhods cutterheads. With a large number of criteria it is necessary to combine them into larger groups that differ in meaning. For geokhods cutterheads the requirements combined into six generalized groups are given in table 4.

Table 4. The structure of the requirements for geokhod's cutterheads and range values of criteria.

Meaning of group	Generalized groups of requirements (criteria)	Range values of criteria	Single requirements
Ensuring movement possibility	K_1 Ensuring the continuous movement of the geokhod to the forehead at a given speed	0-6	Compliance of work of the cutterheads to the number of movement parameters of geokhod to the forehead
			The destruction of the all surface area of the forehead on the amount of movement per revolution of geokhod.
			Compliance of the geometrical parameters of the cutterhead with the parameters of the external drive
Ensuring of changing the direction of movement possibility	K_2 Ensuring of changing the direction of movement possibility	0-2	The possibility of extension of the cutterheads out of the geokhod's body.
Operational requirements	K_3 High reliability of cutterheads	0-6	Uniform load of the cutterhead
			The minimum dynamic of the working
			Minimum number of the drives and active elements

	K_4 Prevention of rockfall	0-2	Possibility to install a protective membrane (diaphragm)
	K_5 Possibility of maintenance of the drive and the rock cutting tools	0-4	Access to the cutterhead drives and the possibility of replacing the rock cutting tools Minimum mass and dimensional characteristics of the cutterheads and drives
Energetical requirements	K_6 Low specific energy	0-10	Creation and destruction of the ledge at the forehead
			Ability to control the orientation of stresses in the rock mass
			Destruction of the ledge on the free surface
			Low dust intensity High drive efficiency of the cutterhead

Using criteria to evaluate alternatives requires the definition of quality gradations, that is, the scale of evaluation criteria. The criterion scale may be natural or artificial. The natural scale is a property, objectively inherent to the object. The artificial scale is designed specifically to describe some important features of the object. At the initial stages of the analysis of different variants of cutterheads of geokhods for all criteria, artificial scales are designed, since the quantitative parameters have not yet been determined. Table 4 shows the ranges of scale values according to the generalized criteria from the condition that all single criteria can be equal to 0, 1 or 2.

For each of the alternatives are assigned the criteria values (Table 5), and each criterion is assigned a weight and threshold indicators (Table 6).

Table 5. Performance matrix.

Alternatives	Criteria					
	K_1	K_2	K_3	K_4	K_5	K_6
A_1	6	2	5	2	4	10
A_2	6	1	4	2	2	6
A_3	6	1	6	2	1	4
A_4	3	2	5	0	2	10
A_5	5	2	3	2	3	10

Table 6. Thresholds and weights.

Threshold (weight)	K_1	K_2	K_3	K_4	K_5	K_6
Criteria weight w_l	0,25	0,25	0,1	0,15	0,15	0,1
Indifference thresholds q_l	1	0	1	0	1	1
Preference thresholds p_l	3	1	2	1	3	3
Veto thresholds y_l	6	2	3	2	4	4

Tables 4, 5 and the alternatives (Fig. 2) are the initial data for ELECTRE III, and Table 6 – decision makers preferences.

Without giving here the intermediate calculations of concordance and discordance indexes, levels of discordance, etc. for $e_2 = 0,2 f_{\max}$ in correspondence with the algorithm on Fig. 1 were got descending, ascending and final preorders:

$$Z^+ \Leftrightarrow A_1 \succ (A_3 \approx A_5) \succ (A_2 \approx A_4),$$

$$Z^- \Leftrightarrow (A_1 \approx A_5) \succ A_3 \succ (A_2 \approx A_4),$$

$$Z \Leftrightarrow A_1 \succ A_5 \succ A_3 \succ (A_2 \approx A_4).$$

The final preorder determines the ranking of alternatives:

- 1) cutting drum;
- 2) double-heading;
- 3) rotating cutterhead;
- 4) single-heading and multi-heading.

Discussion

At this stage, it is necessary not to choose the best alternative, and to exclude from further consideration the worst alternatives (single-heading and multi-heading), because the assigned criteria values to alternatives are subjective.

According to the results of the analysis, the cutterheads that the best satisfying for requirements for geokhods cutterheads are:

- cutting drum [12];
- double-heading;
- rotating cutterhead.

It is impossible to choose the best cutterhead without determining geometric, kinematic and power parameters its works as the geokhod's cutterhead for those alternatives.

The research was sponsored by Grant of the President of the Russian Federation for state support of young Russian scientists MK-664.2018.8.

References

1. V.Yu. Sadovets , V.Yu. Beglyakov, A.B. Efremkov, *Applied Mechanics and Materials*, **770**, 384 (2015)
2. V.V. Aksenov, A.B. Efremkov, V. Yu. Sadovets, E.V. Resanova, *Bulletin of KuzSTU*, **1**, 42 (2010)
3. A.V. Grigoryev, I.Y. Semykina, A.N. Ermakov, I.V. Chicherin, V.V. Aksenov, 19th International Conference of Young Specialists on Micro/Nanotechnologies and Electron Devices, **1**, 667 (2018)
4. V.V. Aksenov, A.B. Efremkov, V.Yu. Sadovets, M.Yu Blaschuk, V.Yu Timofeev, V.Yu Begljakov, *Mining Informational and analytical Bulletin*, **10**, 107 (2009)
5. C. Zopounidis, P. M. Pardalos, *Handbook of Multicriteria Analysis* (DMIA, Berlin, 2010)
6. X. Sun, *Vom Promotionsausschuss* (Technischen Universitat Hamburg, Hamburg, 2012)
7. G.-H. Tzeng, J.-J. Huang, *Multiple Attribute Decision Making: Methods and Applications* (CDMS, Beijing, 2011)
8. A. Ishizaka, P. Nemery, *Multi-criteria decision analysis: methods and software* (Tollman Press, Manchester, 2013)

9. H. Polatidis, D. A. Haralambopoulos, G. Munda, R. Vreeker, *Energy Sources*, **1:2**, 181 (2006)
10. A.A. Khoreshok, V.V. Aksenov, K. A. Ananiev, A.N. Ermakov, *News of the Higher Institutions. Mining Journal*, **3**, 73 (2014)
11. A.N. Ermakov, V.V. Aksenov, A.A. Khoreshok, K. A. Ananiev, *Bulletin of KuzSTU*, **2**, 5 (2014)
12. A.A. Khoreshok, V.V. Aksenov, K. A. Ananiev, A.N. Ermakov, *Proceedings of the 9th China-Russia Symposium "Coal in the 21st Century: Mining, Intelligent Equipment and Environment Protection"*, **176**, 218 (2018)